

INSTRUCTIONS FOR USE

USE

A specially formulated petrolatum tape for application to wet or submerged jetty piles, other marine structures or pipework. It provides the primary corrosion protection as part of the Denso Seashield™ Systems.


SURFACE PREPARATION

Surfaces must be cleaned to remove marine growth, loosely adhering coatings, rust and scale. Areas of exposed steel should be cleaned to SSPC SP 2-3. Suitable cleaning methods include scraping, wire brushing, wet abrasive blasting or high pressure water jetting.

PRIMING

Examine the prepared surface. If there are areas of pitting of more than 2mm depth apply a coat of Denso Paste S105™ using a gloved hand or paint roller to ensure that pits are filled.

DIAGRAM OF THE CORRECT APPLICATION PROCEDURE

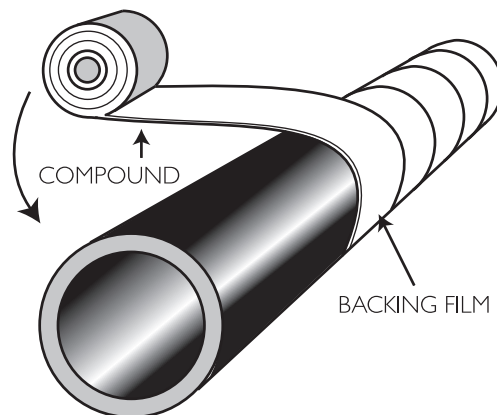

APPLICATION - TAPE WRAPPING

1. Start at the lowest point of the area to be protected.
2. Place the start of the roll of tape against the pile with the backing film outermost and rub down well. Make one circumferential turn around the pile maintaining sufficient tension to displace the water and ensure adhesion. Continue wrapping spirally to give a 55% overlap.
3. To start a new roll of tape, overlap the end of the previous tape by 150mm and continue as before.
4. Finish wrapping at the upper end of the pile by making one complete circumferential turn.
5. Examine the applied tape to ensure complete coverage and smooth overlaps, creases etc by hand.

OVERWRAPPING

Denso™ Marine Piling Tape normally requires an outer covering (e.g. Jacket or Heavy Duty Tape) to protect it from damage.



MARINE PILING TAPES

INSTRUCTIONS FOR USE

STORAGE

Store correct way up in original packaging. Store away from direct heat and open flames.

TRANSPORT

No special precautions necessary.

HANDLING

- Grease resistant gloves are advised to reduce skin contact.
- Avoid contact with face, arms, etc.
- Wash thoroughly after use and before work breaks to remove compound from the skin.
- Careful attention should be given to personal hygiene.
- Change and clean soiled clothing

ACTION IN CASE OF...

FIRE: Extinguish with dry powder, carbon dioxide or chemical foam. Air breathing equipment may be necessary in large fires.

SKIN CONTACT: Wash with warm water and mild soap.

INHALATION: Not applicable

SWALLOWING: Not applicable

SPILLAGE: Not applicable

DISPOSAL

Please minimise or avoid waste wherever possible. Please do not discard waste material, including packaging, in the surrounding environment. Follow all relevant legislation for disposal.



DENSO NORTH AMERICA INC.
90 IRONSIDE CRESCENT, UNIT 12
TORONTO, ONTARIO, M1X 1M3 CANADA
TEL: 416-291-3435
EMAIL: sales@densona-ca.com

Publication Number
343.01.2000

A MEMBER OF WINN & COALES INTERNATIONAL

DENSO NORTH AMERICA INC.
9710 TELGE ROAD
HOUSTON, TEXAS 77095
TEL: 281-821-3355
EMAIL: info@densona.com

IMPORTANT: The information given on this sheet is intended as a general guide only and should not be used for specification purposes. We believe the information to be accurate and reliable but do not guarantee it. We assume no responsibility for the use of this information. Users must, by their own tests, determine the suitability of the products and information supplied by us for their own particular purposes. No patent liability can be assumed.