



HIGHWAY MAINTENANCE PRODUCTS

DENSO OVERBANDING TAPE

INSTANT SEAL AGAINST WATER INGRESS

A polymer modified bituminous sealing membrane for use as an instant waterproof adhesive seal over cracks or failed reinstatement joints (up to 5mm wide) on road pavements on secondary roads.

PRODUCT DATA

Temperature range for application: 8-45°C

Thickness: 2mm

SIZES: 30mm x 10 metre (24 per carton)
40mm x 10 metre (20 per carton)
50mm x 10 metre (16 per carton)



- FAST INSTALLATION, TRAFFIC CAN PASS OVER IMMEDIATELY
- ELASTIC PROPERTIES ACCOMMODATE THERMAL MOVEMENT
- PREVENTS FURTHER DETERIORATION OF THE PAVEMENT
- EFFECTIVE ON ASPHALT OR CONCRETE

DENSOBAND

TOUGH AND COMFORMABLE BOND

A Polymer modified bitumen strip with a disposable interleaving for sealing vertical joints in hot asphalt base and wearing courses to asphalt, concrete or road castings in road repair or construction.

PRODUCT DATA

SIZES: 8mm x 45mm 8mm x 55mm 12 metre rolls
15mm x 45mm 15mm x 55mm 6.5 metre rolls (3 rolls per carton)
8mm x 30mm 12 metre rolls (4 rolls per carton)

NOTE: The 15mm thickness is needed only where excessive movement is anticipated: e.g. at concrete/asphalt joints. Other sizes can be made to order.



- USED IN ROAD, TRAMWAY, RAILWAY AND AIRPORT RUNWAY REPAIRS AND CONSTRUCTION
- MINIMISES RETURN MAINTENANCE VISITS
- ADHERES TO ASPHALT, CONCRETE AND IRONWARE. UNIFORM FLEXIBLE SEAL FOR BASE AND WEARING COURSE JOINTS
- WITHSTANDS ROAD MOVEMENT FROM TRAFFIC LOAD AND THERMAL CHANGES
- COMPLIES WITH DEPARTMENT OF TRANSPORT SPECIFICATION FOR HIGHWAY WORKS, 7TH EDITION WITH 23 YEARS USE IN EUROPE

DENSOBAND PRIMERS

Specially formulated primers for preparing surface of concrete, asphalt or steel for the application and good adhesion of Denso bitumen products.

PRODUCT DATA

Drying time: Typically 10 - 15min. dependant on temperature and air movement.

Flash point: 23°C DensoBand Primer

0°C DensoBand Clear Primer

Container: 5 litre, 25 litre tins.

Approx coverage: DensoBand 150 lin metres

Overbanding: 50mm 150 lin metres

Denso Paving Tape 100mm 75 lin metres



DENSO SKID RESISTANT OVERBANDING TAPE



A SPECIAL TEXTURED SURFACE WHICH HAS BEEN INDEPENDENTLY TESTED AND PROVED TO EXCEED THE MINIMUM SKID RESISTANCE VALUE FOR OVERBANDING MATERIALS SPECIFIED BY THE DEPT. FOR TRANSPORT.

A Polymer modified bituminous sealing tape for use as an instant waterproof adhesive seal over cracks or failed reinstatement joints (up to 5mm wide) on road pavements on secondary roads.

PRODUCT DATA

Temperature range for application: 8-45°C

Thickness: 2.8mm

Skid resistance: 66 wet 67 dry


Minimum requirement: 55 (TRL Road note 27)

SIZES: 30mm x 10 metre rolls (10 per carton)

40mm x 10 metre rolls (8 per carton)

- ROAD SURFACE IS WARMED WITH GAS BURNER PRIOR TO TAPE APPLICATION
- FAST AND EASY INSTALLATION, TRAFFIC CAN PASS OVER IMMEDIATELY
- ELASTIC PROPERTIES ACCOMMODATE THERMAL MOVEMENT
- PREVENTS FURTHER DETERIORATION OF THE PAVEMENT
- EFFECTIVE ON ASPHALT AND CONCRETE
- INSTANT SEAL AGAINST WATER INGRESS
- UV STABLE

DENSO PAVING TAPE

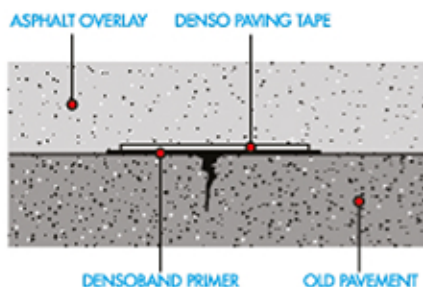

A cold applied, fabric re-inforced, polymer modified bitumen membrane for sealing up to 5mm wide in asphalt and concrete road pavements prior to overlaying with asphalt.

PRODUCT DATA

Temperature range for application: 8 - 45°C

Thickness: 1.6mm

SIZES: 100mm x 10 metre (12 per carton)

150mm x 10 metre (8 per carton)

- FAST INSTALLATION, CAN BE APPLIED BY UNSKILLED LABOUR
- INSTANT SEAL AGAINST WATER, PREVENTS FURTHER DETERIORATION OF ROAD PAVEMENT
- HELPS TO RETARD CRACKS IN NEW ASPHALT OVERLAYS
- EFFECTIVE ON ASPHALT AND CONCRETE
- COLD, SAFE APPLICATION BY ROLLER, APPLICATOR OR BY HAND NO PLANT NEEDED

Scan with

your phone

Go to www.denso.net/distributors
or contact us on 020 8670 7511
mail@denso.net for more information
on our complete range of products.



Supplied by a company
operating an ISO 9001 Quality
Management System and an
ISO 14001 Environmental
Management System.