



Volume 30 - Number 1

Spray applying Protal 7200 to 36" girth weld in 35 seconds in the USA - see story page 8 and 9.

QUALITY & INNOVATION FROM 1883 INTO THE 21<sup>ST</sup> CENTURY



OVER 125 YEARS SERVICE TO INDUSTRY

# WINN & COALES INTERNATIONAL LTD

For further information on our products and their suitability for your particular project, please contact any of the Denso companies listed below:

## WINN & COALES (DENSO) LTD

Denso House, Chapel Road, London SE27 OTR, England  
 ✓ Anti-corrosion and sealing systems

Tel: +44 (0) 20 8670 7511  
 Fax: +44 (0) 20 8761 2456  
 Email: mail@denso.net  
 Website: www.denso.net



## ARCHCO-RIGIDON

Denso House, Chapel Road, London SE27 OTR, England  
 ✓ Corrosion resistant linings

Tel: +44 (0) 20 8761 6244  
 Fax: +44 (0) 20 8761 2456  
 Email: mail@denso.net  
 Website: www.denso.net



## DARTFORD COMPOSITES LTD

Unit 1, Ness Road, Erith, Kent DA8 2LD  
 ✓ Manufacture and repair of FRP panels for cars and trains

Tel: +44 (0) 1322 350097  
 Fax: +44 (0) 1322 359438  
 Website: www.dartfordcomposites.co.uk



## DENSO NORTH AMERICA INC - CANADA

90 Ironside Crescent, Unit 12, Toronto, Ontario, M1X 1M3  
 Canada  
 ✓ Anti-corrosion and sealing systems

Tel: +1 416 291 3435  
 Fax: +1 416 291 0898  
 Email: sales@densona.com  
 Web site: www.densona.com



## DENSO USA - LP

9747 Whithorn Drive, Houston, Texas 77095  
 United States of America  
 ✓ Anti-corrosion and sealing systems

Tel: +1 281 821 3355  
 Fax: +1 281 821 0304  
 Email: houston@densona.com  
 Web site: www.densona.com



## DENSO SOUTH AFRICA (PTY) LTD

120 Malacca Road, Redhill Industrial Area, Durban North 4051,  
 Republic of South Africa  
 ✓ Anti-corrosion and sealing systems

Tel: +27 31 569 4319  
 Fax: +27 31 569 4328  
 Email: bid@denso.co.za  
 Web site: www.denso.co.za



## DENSO (AUSTRALIA) PTY LTD

411-413 Victoria Street, Brunswick, Victoria 3056,  
 Australia  
 ✓ Anti-corrosion and sealing systems

Tel: +61 1300 658 590  
 Fax: +61 39387 6973  
 Email: denso@densoaustralia.com.au  
 Website: www.densoaustralia.com.au



## DENSO (NEW ZEALAND) LTD

PO Box 76167, Manakau City, Auckland,  
 New Zealand  
 ✓ Anti-corrosion and sealing systems

Tel: +64 9274 1255  
 Fax: +64 9274 1258  
 Email: enquiries@denso.co.nz  
 Website: www.densoaustralia.com.au



## SEASHIELD INTERNATIONAL

Denso House, Chapel Road, London SE27 OTR, England  
 ✓ Marine corrosion protection systems

Tel: +44 (0) 20 8670 7511  
 Fax: +44 (0) 20 8761 2456  
 Email: mail@denso.net  
 Website: www.denso.net



## SEASHIELD INTERNATIONAL

9747 Whithorn Drive, Houston, Texas 77095  
 United States of America  
 ✓ Marine corrosion protection systems

Tel: +1 281 821 3355  
 Fax: +1 281 821 0304  
 Email: houston@densona.com  
 Web site: www.densona.com



## SEASHIELD INTERNATIONAL

411-413 Victoria Street, Brunswick, Victoria 3056,  
 Australia  
 ✓ Marine corrosion protection systems

Tel: +61 1300 658 590  
 Fax: +61 1300 655 064  
 Email: denso@densoaustralia.com.au  
 Website: www.densoaustralia.com.au



## SEASHIELD INTERNATIONAL

PO Box 76167, Manakau City, Auckland,  
 New Zealand  
 ✓ Marine corrosion protection systems

Tel: +64 9274 1255  
 Fax: +64 9274 1258  
 Email: enquiries@denso.co.nz  
 Website: www.densoaustralia.com.au



## PREMIER COATINGS LTD

Headcord Road, Smarden, near Ashford,  
 Kent TN27 8PJ, England  
 ✓ Membranes and corrosion protection systems

Tel: +44 (0) 1233 770663  
 Fax: +44 (0) 1233 770633  
 Email: enquiries@premiercoatings.com  
 Website: www.premiercoatings.com





LEADERS IN CORROSION PREVENTION & SEALING TECHNOLOGY

# Rehabilitation of Existing Wastewater Pipelines

Sandwiched between the Engen Refinery and Mondi Paper Mill and a stone's throw from the Durban coast, lies the Bluff Central Wastewater Pump Station.

Denso Surface Tolerant Epoxy and Denso Steelcoat 500 System were approved to provide long term corrosion prevention to the existing wastewater pipeline.

After mechanical preparation to ST2 and degreasing, a coat of Denso ST Epoxy at 250µm was applied by brush to the entire pipe

Pictures show the wastewater pipeling protected with the Denso Steelcoat 500 sytem.

## Project Summary

**Product type:**  
Exposed Steel Coating

**Country:** South Africa  
**Location:** Durban  
**Object:** Wastewater pipeline  
**Problem:** Corrosion prevention  
**Product solution:** Denso Steelcoat 500 System



surface. This was then overwrapped with the Denso Steelcoat 500 System ensuring the pipeline has all the protection required to withstand the harshest and most corrosive environment.



For quick identification of the relevant product type used in each story we have used the following colour codes:

### Protective coatings for.....

- BURIED PIPELINES & LPG VESSELS
- EXPOSED STEEL & PIPEWORK
- SUB SEA PIPELINES & JETTY PILES

### Protective linings for.....

- STORAGE TANKS, PUMPS ETC

### Sealing & waterproofing.....

- SEALING MASTICS
- MEMBRANES & FLASHINGS
- INDUSTRIAL TAPES



LEADERS IN CORROSION PREVENTION & SEALING TECHNOLOGY

## Fire Resistant Densyl KF Colourtape System used on Fire Water Pipeline Flanges

At the Otahuhu Power Station in Auckland, New Zealand, the cooling towers are constructed of wood. This is fine when they are operational but pose a fire risk when a cooling cell is offline. Elevated temperatures in the system can dry the cell out creating a potential fire hazard.

The power station, owned by a major energy company in New Zealand, Contact Energy, is a gas thermal station situated between a residential and industrial area. As a result a fire suppression system was specified. The company

contracted to construct this system, Wormald engineering required a large number of flange joints to be protected post installation.

Crucial to the success of the installation is a line pressure test, to be conducted prior to the



Application of the Denso KF Colourtape.

Denso application. An opportunity existed to train the operators in the correct application of the fire resistant Densyl KF Colourtape system.

An inspection was required at various stages of the installation to ensure the correct application was carried out. As a result the asset owner was reassured that the training on site would offer peace of mind in the correct installation of the system. In this project Denso were involved in the specification, supply, training and after sales service. As the asset owner was represented by a large engineering consulting company, this ensures that Denso Systems are considered across a wider network.

Below and inset: Fire water pipeline flanges protected with Densyl KF Colourtape which is fire resistant.



### Project Summary

**Product type:**  
Exposed Steel Coating

**Country:** New Zealand  
**Location:** Auckland  
**Object:** Fire water pipe  
**Problem:** Corrosion prevention  
**Product solution:** Densyl KF Colourtape



LEADERS IN CORROSION PREVENTION & SEALING TECHNOLOGY


# Denso Hotline Tape Protects Blow Down Pipe

Denso Hotline Tape was chosen by Utility Operating and Maintenance Service Ltd (UOMS) for the protection of a new underground boiler blow down pipe at Synergen's Dublin Bay Power Station. UOMS and Synergen are wholly owned by ESBI, a leading engineering and energy company.


Denso Hotline Tape was chosen because of its ability to withstand temperatures of 110°C, which can be the temperature of the water removed from the boiler by the blow down pipe. To complete the protection system Denso Self-Adhesive PVC Tape was applied over the Hotline Tape with both tapes applied in one application using a Denso Hand Wrapping Machine. This wrapping work was carried

out on site by UOMS and local contractor CLG Developments.

Denso Hotline Tape is a cold applied, conformable petrolatum based tape for the protection of pipes operating at elevated temperatures (up to 110°C). It is suitable for the protection of copper, iron or steel pipes above ground, in ducts or set in concrete and in consequence is becoming widely used by factory and power station engineers.

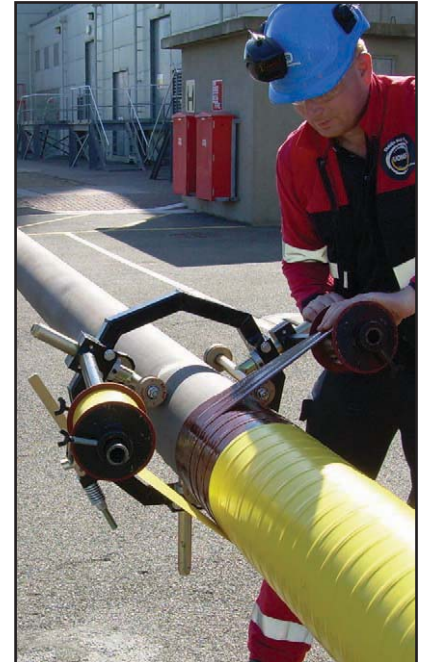

The perfect dual application of Denso Hotline Tape and Denso Self-adhesive PVC Tape is achieved in one easy operation using a Denso Hand Wrapping Machine.

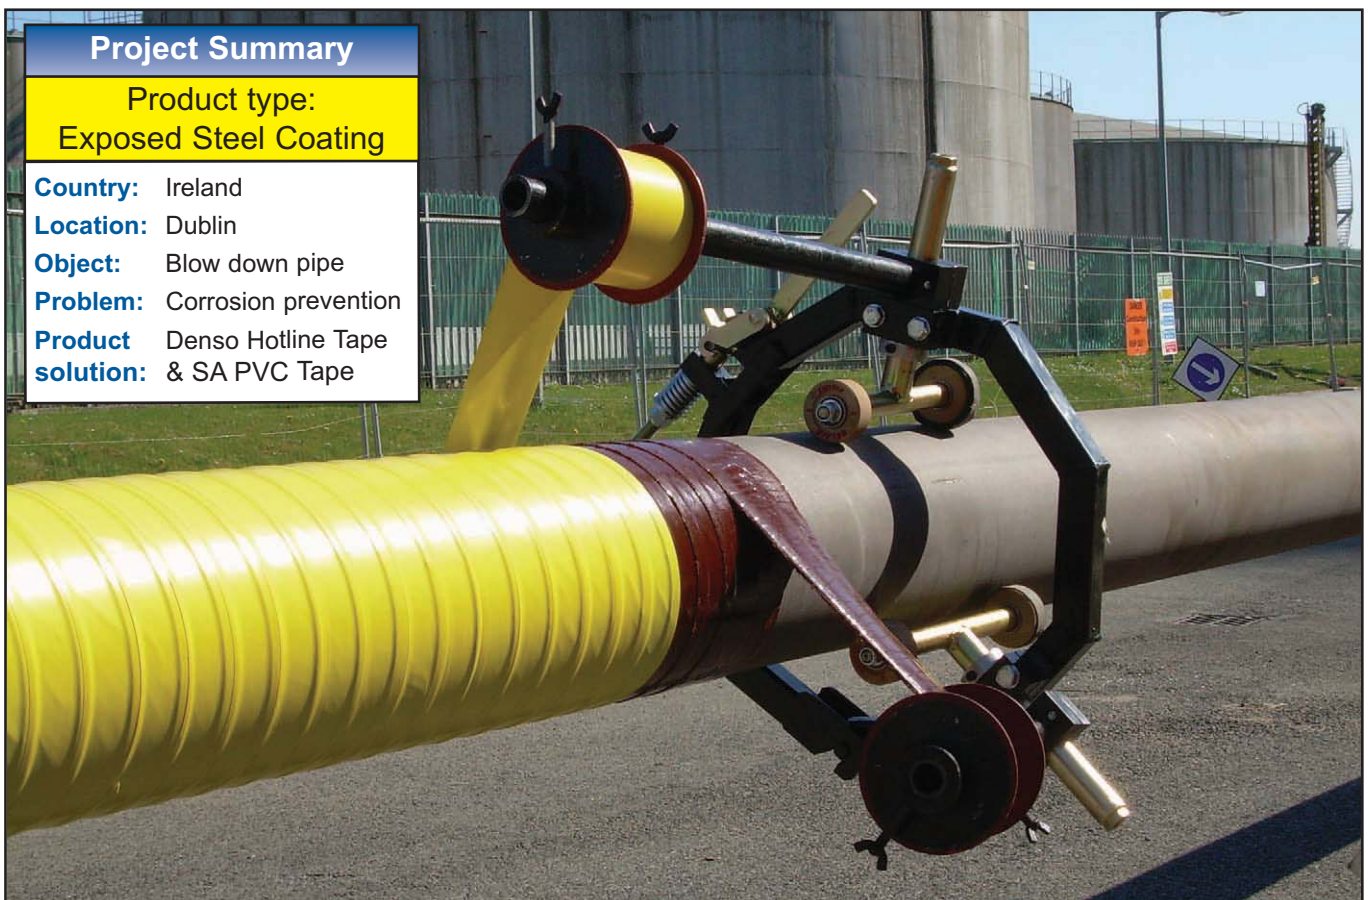



LEADERS IN CORROSION PREVENTION & SEALING TECHNOLOGY

## The Skilled Trade of Field-Hand Applied Epoxies

There has been a lot of discussion surrounding the question of using automated spray equipment for field applied joint coatings versus the traditional hand applied method. The automated spray technology has been available for over 10 years, and with continuous improvements to the equipment, it is being utilized more often in the North American Market. Although the equipment is readily available, the method of using paint rollers and paint brushes still dominates the Canadian Pipeline Industry.

Denso Protal 7200 being applied to a welded joint.

As part of Denso North America's QA/QC Field Applied Coating Training/Certification program and general on-site involvement, we are continually either applying our epoxies ourselves or observing Pipeline Contractors apply them. What is a common misconception, unfortunately for the Pipeline Industry, is that properly applying epoxies in the field is easy and anyone can do it. This is absolutely wrong.



**PROTAL**



## LEADERS IN CORROSION PREVENTION & SEALING TECHNOLOGY

The art of properly hand applying a product like Protal 7200 is a learned profession not unlike the work that the welder does prior to the pipe being coated. Uniformly applying (within microns) a holiday free joint coating, many times in unfavorable weather conditions, and continuously meeting stringent pipeline owner specifications, plus completing this task at high levels of production is something that



The highly skilled crew from Ledcor with a recently completed a Protal 7200 protected joint.



### Project Summary

**Product type:**  
Buried Steel Coating

**Country:** Canada  
**Location:** Unspecified  
**Object:** Pipeline  
**Problem:** Corrosion prevention  
**Product solution:** Denso Protal 7200

takes a high level of skill.

Field applied joint coatings have a much higher visibility in the industry due to the obvious concerns of pipeline failures if the coatings application is done incorrectly. There is much more visibility than there was even 10 years ago. With this higher interest level, QA/QC in the field has increased dramatically, and with proper coating inspection by qualified inspectors being executed, superior application skill levels are being achieved and also a higher demand for precision automated equipment to apply these epoxies.

Additionally, organizations such as NACE (National Association of Corrosion Engineers) are developing intensive training programs that focus strictly on the proper application of hand applied pipeline coatings to further the cause.

The debate of hand applied joint coatings versus the use of automated spray applied equipment has many

comparisons, such as cost of production, quality issues, climate conditions, pipe diameter variances, technology vs. traditional labour, etc, etc.

What we have generally observed in Canada is that a well seasoned coatings crew is comparable both in production and quality to the current equipment that is on the market. Take for example the coatings crews of Ledcor Pipelines which we have worked with for years, supplying epoxies for joint coatings on large diameter, long distance pipelines. One crew in particular we have observed over the years is truly impressive, this team has applied literally hundreds of thousands of joint coatings and they themselves look and operate like a well oiled machine.

As the debate continues, one thing for certain is that Denso Coatings in the field are being applied with higher and higher levels of quality which is to everyone's benefit.



LEADERS IN CORROSION PREVENTION & SEALING TECHNOLOGY

# Automatic Spray Ring Applies Protal 7200 to Girth Welds

On a recent 36" pipeline construction project in Louisiana, Michels Pipeline Construction utilized the services of Pipeline Induction Heat (PIH) to apply Denso's Protal 7200 to the mainline girth welds. This was the first project in the USA where an automated plural spray ring was utilized to apply the weld joint coating. In the past, the weld joints were always coated by brush or roller. The advantages over brush application were considered to be speed of application and a more uniform dry film thickness (DFT). Both expectations were achieved as PIH was able to coat an average of 160 weld joints/day with DFT's between 24 and 32 mils.

## Project Summary

**Product type:**  
Buried Steel Coating

**Country:** USA  
**Location:** Louisiana  
**Object:** Pipeline weld joints  
**Problem:** Corrosion prevention  
**Product solution:** Denso Protal 7200



Automatic Spray Ring clamped and ready to apply Protal 7200 to blasted girth.





LEADERS IN CORROSION PREVENTION & SEALING TECHNOLOGY



Automatic Spray Ring moving to the next joint.

First, the 36" weld joint was blasted to a near-white finish, SSPC-SP 10/NACE No. 2, while achieving a 4.0 mil anchor profile. Then, the surface area was preheated with an induction coil to 180F. Finally, PIH's automatic spray ring was able to coat the weld joint in about 35 seconds with 5 rotations (approx. 6 mils per pass) of the spray tip. All 3 steps of surface preparation, pre-heating and coating took approx. 4 minutes. In an 8 hour work day, they were able to coat up to 200 joints.

Protal 7200 is a two-part, 100% solids epoxy coating that can be applied in one coat up to 50 mils. The product exhibits outstanding adhesion to steel and FBE, as well excellent resistance to cathodic

disbondment. It has high impact and abrasion resistance for directional drill applications.

Furthermore, the extremely fast cure makes it ideal for tie-ins, bore joints and holiday repairs.



Above: Protal 7200 applied at 24 to 32 mils DFT.

Corrosion Prevention for Pipeline Weld - United States of America



LEADERS IN CORROSION PREVENTION & SEALING TECHNOLOGY

## Denso Protal Protects Gas Manifolds

Bryan Donkin RMG Gas Controls of Chesterfield has recently completed the manufacture of a pair of 24" diameter carbon steel gas manifolds. These are the first of four underground manifolds to be supplied for the National Gas Grid Windsor Street project in Birmingham.

To protect the manifolds, National Gas specified a Denso Protal brush coating which was applied by J M Shotblasting also of Chesterfield, following shotblasting to SA2½ standard. Two coats of the Denso Protal were applied to give a total thickness of 1500 microns with a gramophone finish which will

give zero gas leakage when connected to a gas main. J M Shotblasting also ensured that prior to coating, all flange ends and bolt holes were cleaned out and protected.

Denso Protal coatings provide an effective anti-corrosion coating for metals. They do so by forming a firmly

Project Summary	
Product type: Buried Steel Coating	
<b>Country:</b>	United Kingdom
<b>Location:</b>	Birmingham
<b>Object:</b>	Gas manifold
<b>Problem:</b>	Corrosion prevention
<b>Product solution:</b>	Denso Protal

bound corrosion inhibiting film on the metal surface which creates a thick effective physical barrier against air and moisture and remains permanently flexible. A grade is also available for application by plural Hydrocat spray.

One of the 24" gas manifolds coated with Denso Protal and awaiting installation.





LEADERS IN CORROSION PREVENTION & SEALING TECHNOLOGY

## Water Pipeline Protected on the New Peterhead Quay

Westminster Dredging and RJ Mcleod were recently awarded the contract for a scheme with a value of £27.7m to form a new multi-purpose quay in Peterhead Harbour which will provide a 200 metre long, all weather, deepwater berth at the Smith Embankment.

As part of the scheme, new pipelines which will carry water to a range of vessels using the new quay, were required to be protected from the corrosive marine environment.

To provide the necessary protection Denso stockists, Burdens (of Aberdeen) supplied RJ Mcleod with Denso Paste S105, Denso Tape and due to the harsh environment, an outerwrap of Densoclad 50 Tape.

Denso Mastic Strips were also used to protect the bearings of the water pumps on top of the 14 piles that the new quay deck is sitting on.

Apart from the additional anti-corrosion protection, Densoclad 50 Tape's extremely tough pvc backing combined with polymer bitumen adhesive ensures resistance to impact and

the mechanical abrasion likely to be experienced on a working quayside.

The new Peterhead Quay showing the Densoclad 50 Tape protected water pipeline, running alongside it.




### Project Summary

Product type:  
Exposed Steel Coating

**Country:** Scotland  
**Location:** Peterhead Harbour  
**Object:** Water pipeline  
**Problem:** Corrosion prevention  
**Product** Denso Tape,  
**solution:** & Denso Paste S105

### New Improved Densoclad Tape...

Densoclad Tape, normally used for the corrosion prevention of buried or immersed pipes and fittings is one of the company's most durable products and comes in a choice of thicknesses. The optimum application for Densoclad Tape recommends a 55% overlap of the tape and as a guide to achieve this correct overlap, every roll now features the product name and size printed down the centre of the tape. This gives a visual indication for the correct overlap (see image). Not only will this speed up the application, improve accuracy and reduce wastage, it will also allow customers to identify in future which Densoclad Tape variety they originally used.

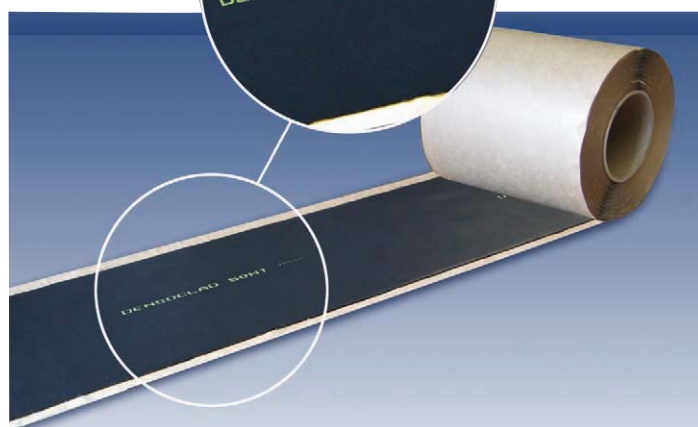



Certificate No. FM 01548  
BS EN ISO 9001:2008

Most Denso products are covered by patents and the words "DENSO", "DENSYL", "ARCHCO-RIGIDON", "DENSOPOL", "DENSOCLAD", "TOKSTRIP", "CORROCLAD", "SYLGLAS", and "PROTAL" are registered trade names in the UK and many other countries.



## Would you like more information about our long-term corrosion prevention and sealing systems?

If you are interested in any of the products featured in this issue of the Denso Digest please tick box:

Please indicate page number(s):

We also offer tried and tested systems to deal with all the problem areas listed below, simply fax back this completed page and we will supply you with more information.

### BURIED ONSHORE COATINGS

- External corrosion prevention for underground pipelines, welded joints, valves and fittings.
- Protection of mounded LPG vessels and fuel tanks.

### SUB SEA/SPLASH ZONE COATINGS

- Maintenance corrosion protection for steel jetty piles.
- Subsea pipelines and outfalls.
- Protection of timber and concrete piling.

### SEALING MASTICS

- Joint sealing of precast concrete manholes and culverts.
- Joint and crack sealing of asphalt road surface wearing courses.
- Joint sealing for airport runways.

### EXPOSED SURFACE COATINGS

- Corrosion prevention for chemical plant, structural steelwork, above ground pipes, storage tanks, offshore rigs, bridges and support cables, cranes and pipe bridges.
- Corrosion prevention for metal roof purlins and metal roof sheets.
- Protecting pre-stressing and post tensioning bridge cables and ground anchorages.

### INDUSTRIAL LININGS

- Internal linings for tanks, pumps, vessels and pipelines.
- Linings for concrete bunds and floors.
- External abrasive wear protection

### INDUSTRIAL TAPES

- Sealing and insulating
- Protecting and bonding

### MEMBRANES & FLASHINGS

- Tanking / waterproofing.
- Exposed rooftops and parapets.

### DIY WEATHERPROOFING


- Waterproofing and flashing

**For further information - tick boxes, fill in coupon and fax or post to your nearest Denso branch (full list of addresses on page 2).**

Name: \_\_\_\_\_ Title: \_\_\_\_\_

Company: \_\_\_\_\_

Address: \_\_\_\_\_

Phone: \_\_\_\_\_  Fax: \_\_\_\_\_

**FAX NUMBERS** UK: +44 (0) 20 8761 2456 ● USA: +1 281 821 0304 ● CANADA: +1 416 291 0898

AUSTRALIA: +61 39387 6973 ● NEW ZEALAND: +64 9274 1258 ● SOUTH AFRICA: +27 31 569 4328