

For over 50 years... and we still have it sealed

Denso strip*

Denso strip*

FOR MORE INFORMATION



mail@denso.net
www.denso.net



020 8670 7511



Winn & Coales (Denso) Limited
Denso House, Chapel Road, London SE27 0TR

For waterproofing membranes contact
PREMIER COATINGS LIMITED
Tel: 01233 770653
or visit our website at
www.premiercoatings.com

YOUR STOCKIST


* WHEN SOLD UNDER A PREVIOUS BRAND NAME



from the makers of

Denso TAPE

the Worlds best selling ANTI-CORROSION TAPE

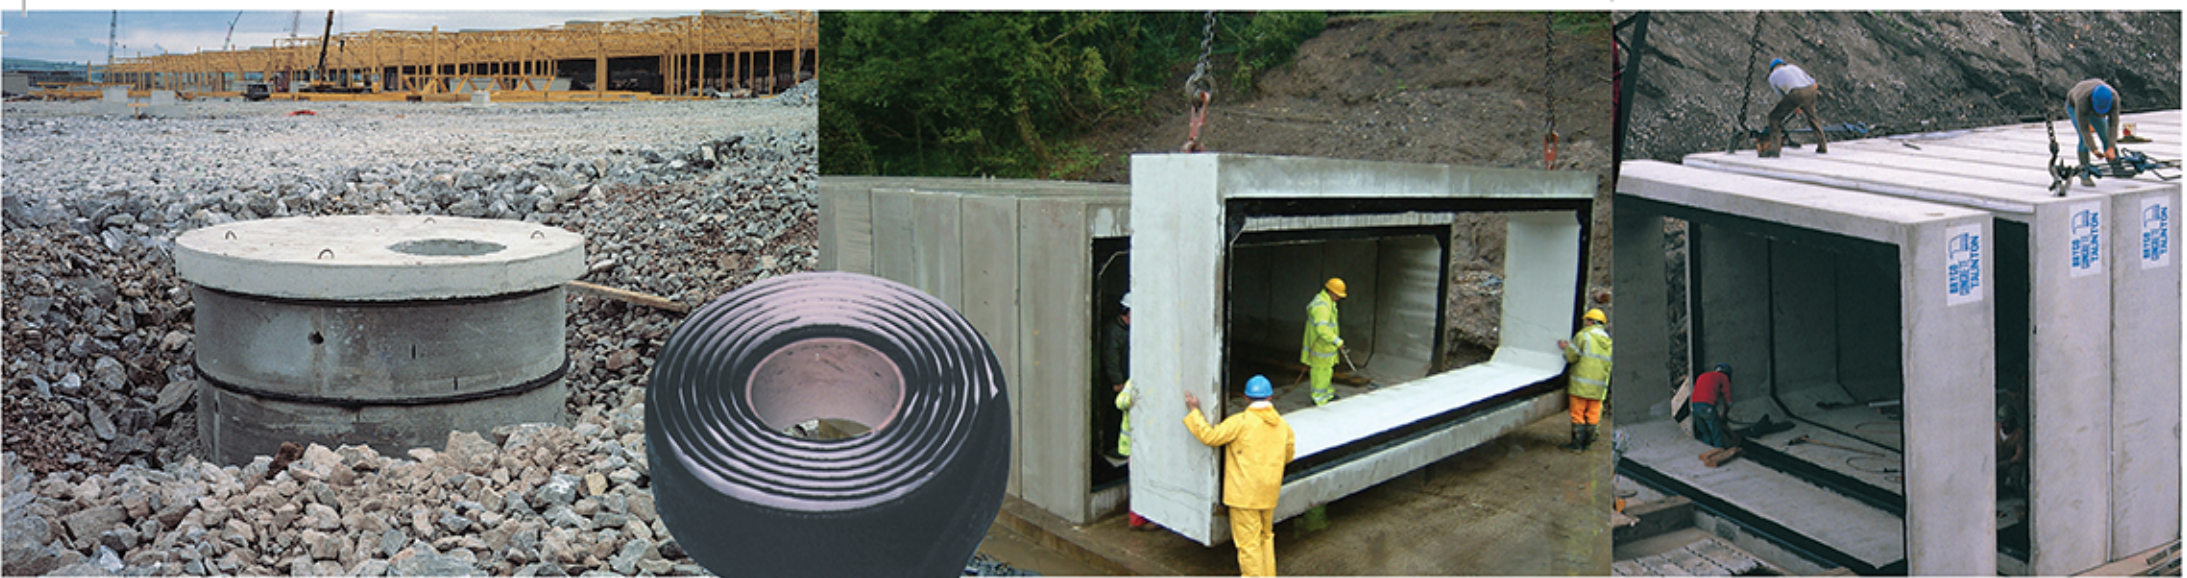

Densostrip

A compound rubber and bitumen joint sealing strip for sealing the joints of precast concrete units to provide a permanently flexible watertight seal when compressed between joint faces previously primed with Densostrip Primer. This enables an effective seal for precast concrete box culverts, manholes, inspection chambers, shafts, tunnels and pipe sections. Densostrip concrete joint sealing strip is resistant to chemical and biological attack. Recommended by precast concrete manufacturers; when used with Densostrip Primer it meets BS EN 1917:2002 requirements for manholes (no need for concrete surrounds).



Densostrip

THE BEST SYSTEM FOR
JOINTING PRECAST BOX CULVERT SYSTEMS
AND JOINTING PRECAST
INSPECTION CHAMBER RINGS

A cold applied preformed sealing strip based on bitumen for sealing joints between precast concrete units used for manholes, box culverts, pipes and tunnel segments.



Densostrip Primer available in 5 and 25 litre cans

DENSOSTRIP must be used in conjunction with DENSOSTRIP PRIMER to meet the European Standard BS EN 1917

TYPICAL PROPERTIES	DATA
Colour	Black
Non-volatile content	100%
Specific Gravity	1.37
Specific Volume	730cm ³ /kg
Softening Point	>100°C
Flexibility	Excellent
Extensibility	>600%
Adhesion to concrete	Excellent
Watertightness	Withstands >0.5 bar
Resistance to Acids, Alkalis and Salts	Excellent
Resistance to Microbiological attack	Excellent
Root resistance	Contains additive to prevent penetration
Temperature Range For Application	-5°C to +40°C
For Service	-15°C to +40°C

RECOMMENDED PRIMER	Densostrip Primer
PACKING	Supplied in reels with a range of section sizes to suit particular joint designs.
APPLICATION	Instructions for use are supplied in every carton.

FLEXIBLE RUBBER BITUMEN SEALING STRIP SYSTEM

- BS EN 1917 2002 Concrete manholes and inspection chambers
- CESWI Civil Engineering specification for the water industry
- 7th Edition (UKWIR Ltd)
- Sewers for adaption, 5th edition (WRC Plc)
- Densostrip is manufactured under a management system conforming to BS EN ISO 9001:2008

Click onto denso.net/densostrip to watch the application video. Full Technical Data sheets available



Supplied by a company operating an ISO 9001 Quality Management System and an ISO 14001 Environmental Management System.

* WHEN SOLD UNDER A PREVIOUS BRAND NAME